

ELESER[®]
Home lifts and Goods lifts manufacturer

Goods Only Lifts


We improve your Productivity

Goods Only Lifts

ROBLES ELESER S.L., manufactures goods only lifts for the elevation of goods between different floors from 100 kg up to 10,000 kg.

SPECIALIST in the design and manufacture of products for elevation, we offer custom solutions for every application that improve the storage and logistics in Companies.

ELESER'S GOODS ONLY LIFTS ARE FOR INDUSTRIAL USE , NOT SUITABLE FOR PEOPLE

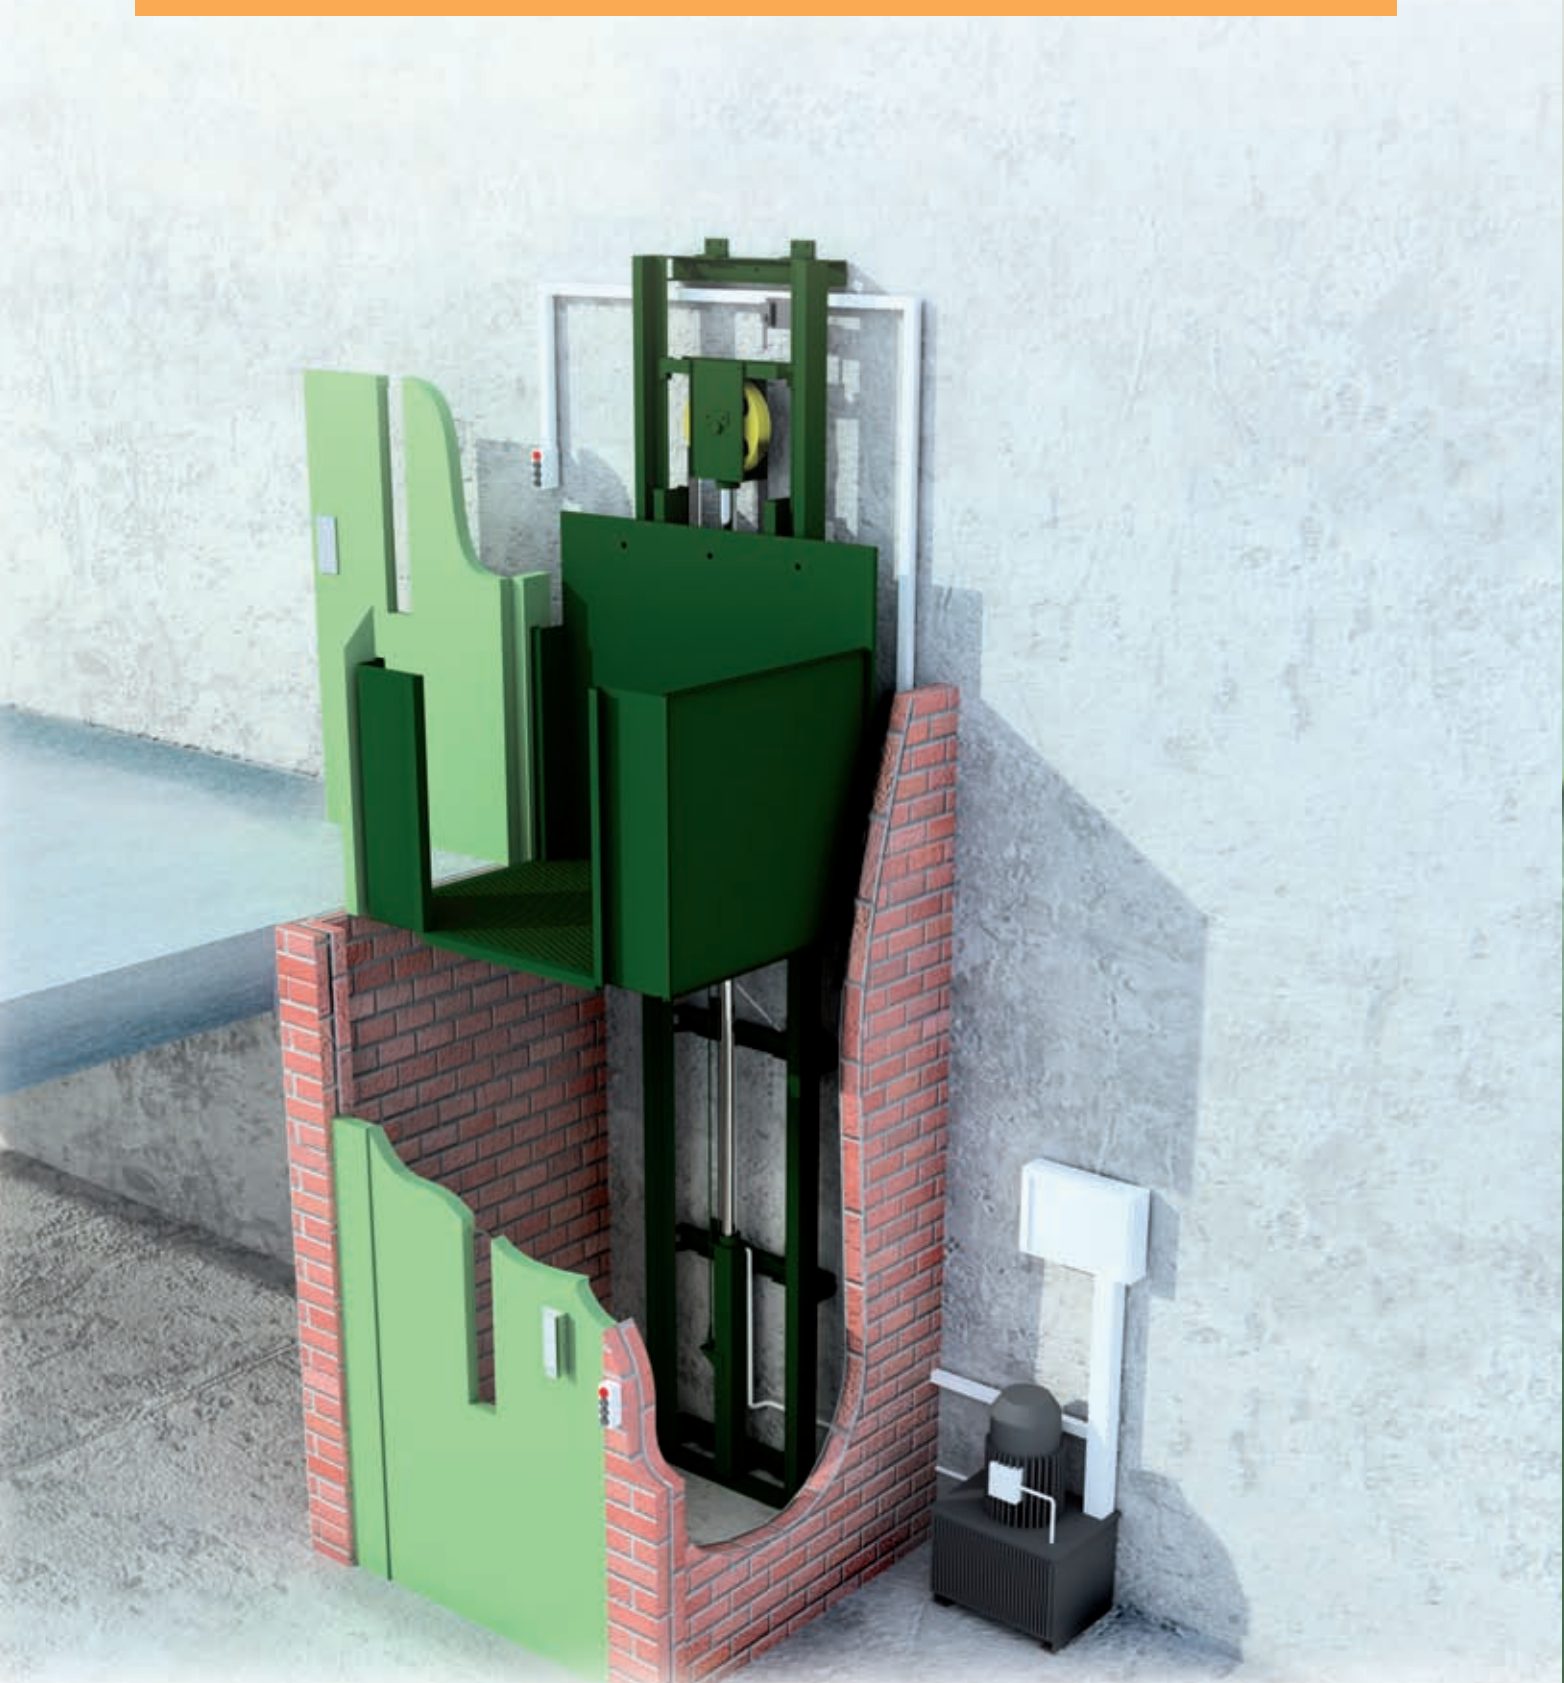

EASY Goods Lifts

Main Advantages

- Compact, functional, and very easy & quick to install lifting platform. Minimum auxiliary work.
- Great load capacity.
- Maximum optimization of the space available for the load.
- Ecologic. Low power consumption, works with domestic electric current.
- Safe and reliable hydraulic power unit.
- Minimum maintenance.
- Excellent value for money.
- Automatic re-leveling system The platform's floor remains always levelled with landing entrance's floor at each stop.

General Features

- Lifting platform specifically designed for goods elevation.
- Three EASY models for different load capacities: from 100kg up to 500 kg.
- Non-slip surface.
- Perimeter barriers to ensure the load.
- The platform's car slides by means of silent vulkollan slides.
- Pre-assembled electrical installation. Very easy to assemble with identifiable connectors.
- Installation within a closed shaft with resistant walls. Enclosure manufactured with metallic or building materials.
- As a protective and safety measure, all entrances must have an access door with an electric and mechanical safety locking device.

Technical Features

- Hydraulic elevation using single effect pistons. 2:1 transmission ratio.
- Automatic manoeuvre control board 24 Vcc.
- Motor types: Three-phase 230/400 Vac and Mono-phase 230 Vac.

For all EASY Goods Lifts

- Depth (mm): from 700 minimum to 1300 maximum, by increment of 50 mm.
- Width (mm): from 800 minimum to 1300 maximum, by increment of 50 mm.
- Minimum Shaft size (W x D): 850 x 935 mm.



Technical Features Table

Model	Load(kg)	Max. Travel (m)	Piston rod	Static pressure (bar)	Engine (hp)	Pump (lpm)
EASY-20	100	9	Ø40	60	1,5	5,36
	200	8		75		
EASY-40	200	13	Ø50	52	2	8,84
	300	12		61		
	400	11		71		
EASY-50	500	10	Ø50	80	3	8,84

PHE-2PHE Goods Lifts

Main Advantages

- Minimum maintenance.
- Excellent value for money.
- Ecological, reduced energy consumption.
- Very safe, has a parachute valve.
- Different models, allowing us to offer a product that is best suited to the client's needs.
- Total accessibility from all sides.
- High resistance.
- Technology determining the development of the product.
- Safe and reliable hydraulic unit.
- Design which allows easier loading and unloading.

General Features

Designed to meet the needs of vertical goods transportation with hydraulic drive.

- Hydraulically operated lifting platform, specifically designed for lifting goods.
- Installation within a closed shaft with resistant walls, enclosure manufactured from building materials or metal.
- As protective and safety measures, all entrances must have an access door with electric and mechanical safety locking device.
- Automatic levelling (optional), the platform's floor remains constantly levelled when loading and unloading.
- Non-slip flooring.
- Barriers to secure the load. The barriers surround the entire perimeter of the goods lift, except for the goods entrance. ELESER provides options adapted to specific company's needs.

Technical Features

- Hydraulic elevation by single-acting pistons, with a 2:1 or 4:1 force ratio.
- Automatic manoeuvre: 24Vcc.
- Motors: 230 / 400 Vac three-phase & 230 Vac single-phase.



One column Goods Lift

- Platform with rated loads from 150kg to 3,000kg.
- Only one column.
- Up to three entrances.
- Non-slip surface.


Standards and Regulations:

This product is manufactured according to european regulation:

- Directive 2006/42/EC

The following standards and specifications have been considered for the design and manufacture:

- Standard UNE-EN ISO 12100-1292-1
- Standard UNE-EN ISO 12100-1992-2
- Standard UNE-EN 81-2:2001
- REBT: Low Voltage Electrotechnical Regulation

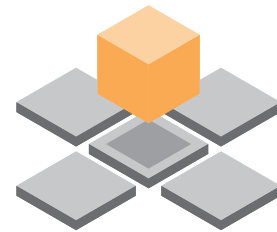

ELESER[®]
Home lifts and Goods lifts manufacturer



Double column Goods Lift


- Platform with rated loads from 1,000kg to 3,000kg.
- Two lateral columns.
- Up to three entrances.
- Non-slip surface.



Double opposite column Goods Lift

- Platform with rated loads from 1,000kg to 6,000kg.
- The columns are face to face.
- Up to two entrances.
- Non-slip surface.

Authorized Representative:

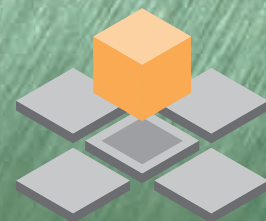

ELESER[®]
Home lifts and Goods lifts manufacturer

Ctra. Sevilla-Mairena del Alcor, km. 0,8
41500 ALCALÁ DE GUADAIRA - SPAIN
Tel.: +44 (0)20 3286 1417 / +34 955 634 649
Fax. +34 955 634 653
www.eleser.es