


HCA the platform for vertical transportation of goods with specialised workers on board.



The goods lift with attendant enables movement and organization of goods that must travel between different floors streamlining staff costs.



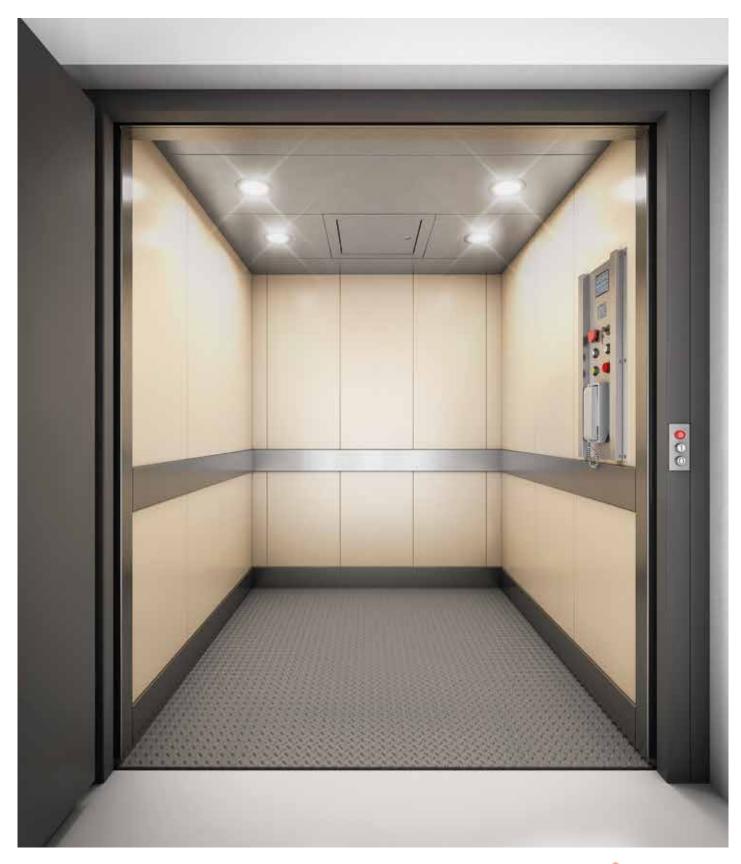





We have designed a safe and silent goods lift with cabin under the most advanced technology for goods vertical transportation, allowing specialised workers on board, for 1000, 1500 and 2000Kg.

MAIN ADVANTAGES:

- Optimises staff time
- Helps with order and organisation
- Does not need a masonry room machine
- Functional, comfortable & silent
- Low power consumption (environment-friendly)
- Minimum maintenance
- Excellent quality price ratio
- Low pit and headroom
- Secure for the users and for maintenance workers

SAFETY:

- Installation into a closed shaft with resistant masonry or metallic walls
- All accesses protected by doors with electrical interlocked system
- Emergency stop button
- Closed cabin
- Final limit switch
- Manual lowering device
- Automatic re-levelling for the lift to remain stable during loading and unloading operations
- Pressure switch
- Thermal relay for motor protection
- Mechanical safety locking pins for works under the platform
- Immaterial barrier in cabin (photoelectric cell)
- Phone in cabin
- Automatic rescue system in case of power cut
- Immediate stop of the cabin in case of broken cables

GENERAL FEATURES:

- Galvanized cabin
- Silent hydraulic power unit
- Direct acting piston until 4.5m, and indirect acting 2 to 1 piston until 14m
- Speed until 0.15 meters per second
- Cabin clear height 2100mm
- Non-slip flooring with tread plate
- Baseboard
- Ceiling hatch
- LED lighting

OPTIONS:

- Inox cabin (walls & ceiling)
- Cabin (walls & ceiling) in steel plate with polyurethane coating RAL 7032
- Pre-assembled electrical installation
- Automatic cabin doors
- Built-in lift telephone
- Half-height wall guard
- Machinery cabinet

USEFUL FOR:

- Industries
- Warehouses
- Shops
- Department stores
- Agribusiness
- Hotels
- Restaurants

Model	HCA 100	HCA 150	HCA 200
Load	1000 Kg	1500 Kg	2000 Kg
Area	≤3 m²	≤4,5 m²	≤5,6 m²
Maximum travel for direct piston	4500 mm		
Maximum travel for indirect piston	14000 mm		
Cabin height	Starting from 2100 mm		
Headroom	Cabin height + 600 mm		





- **2** Cabin operating panel
- 6 Landing doors
- 4 Landing operating panel
- 5 Cabin
- 6 Guides
- Machinery cabinet
- 8 Piston

Goods lift with workers on board for industry and warehouses or points of sales. Improves the movement of goods permitting the same worker to load and unload.



DIRECTIVE & STANDARDS:

This product has been manufactured according to Machinery Directive 2006/42/EC.

The following Standards & Rules have been considered for its design and manufacture:

UNE-EN ISO 12100:2012 UNE-EN 81-20:2017

NOTIFIED CONTROL BODY



www.imq.it/en

