

EXAMPLES FOR ITS APPLICATION:



Our lifts stand out by their excellence, which is the result of a permanent investment in R&D and the use of first quality materials.



IF YOU SCAN THE QR,
YOU WILL BE ABLE TO
VISIT THE PRODUCT
AT OUR WEBSITE.

Authorized Representative:



Ctra. Sevilla - Mairena del Alcor, km. 0,8
41500 Alcalá de Guadaíra, Seville, Spain

Ph. +34 955 634 649

email: eleser@eleser.es
www.eleser.es/en/



We Improve your
Quality of Life
with All Security



Mini elevator for the exclusive use of small goods.
 Robust and easy to clean, it is versatile at vertical transportation of small material.
 Permits to optimize the space.
 Electrical action with variable-frequency drive, for smooth starts and stops.

MODELS:

- Model DW 50 for 50 kg. ≈110lbs. load.
- Model DW 100 for 100 kg. ≈ 220lbs. load.

MAIN ADVANTAGES:

- Silent.
- Useful.
- Saves time.
- Speed: 0.31 or 0.39 m/s
- Travel: up to 35 m. (non-standard, please contact us)
- Up to 12 stops.

APPLICABLE FOR:

- Dumbwaiter for hospitality industry as restaurants, bars, coffee shops or hotels.
- Mini goods lift for retail, like shoe shops, bag shops, boutiques, etc.
- Books-lift for libraries or bookstores.
- Instruments-lift for hospitals, clinics or chemist's shops.
- Documents-lift for offices.
- To carry clothes, household goods and plates at private kitchens, it allows a less physical effort and keeps a better order at home.

OPTIONS:

- Galvanized self-supporting structure.
- Enclosure for structure, manufactured in galvanized metal sheet.
- Key switch.
- Emergency Stop button.
- Machine room trap door.



TECHNICAL FEATURES:

- Cabin sizes:
 - Maximum: 800x800 mm.
 - Minimum: 400x400 mm.
- Standard cabin height: 800 mm. and maximum: 1200 mm.
- Motor power: 0.37 kw or 0.74 kw.
- Power supply options:
 - 230V – Single-phase 50hz/60hz.
 - 400V – Three-phase 50hz/60hz.
- Stainless Steel cabin.
- Removable intermediary shelves.
- Doors: manual bi-parting type (guillotine) with 2 vertical opening panels, stainless steel finish.
- Clear Opening from 400 mm to 800 mm
- Landing operating panels with send control to each floor, as well as present & in use light indicators.
- Acoustic alarm (buzzer) for lift arrival at floor.
- Possibility for any type of access: simple (front or side), double (90° or 180°) or triple (270°)

SECURITIES:

- Final limit switches for car & counterweights.
- Cables slackening contact.
- Motor brake.
- Locks with security contact in doors.

DIMENSIONS OF CABIN AND SHAFT:

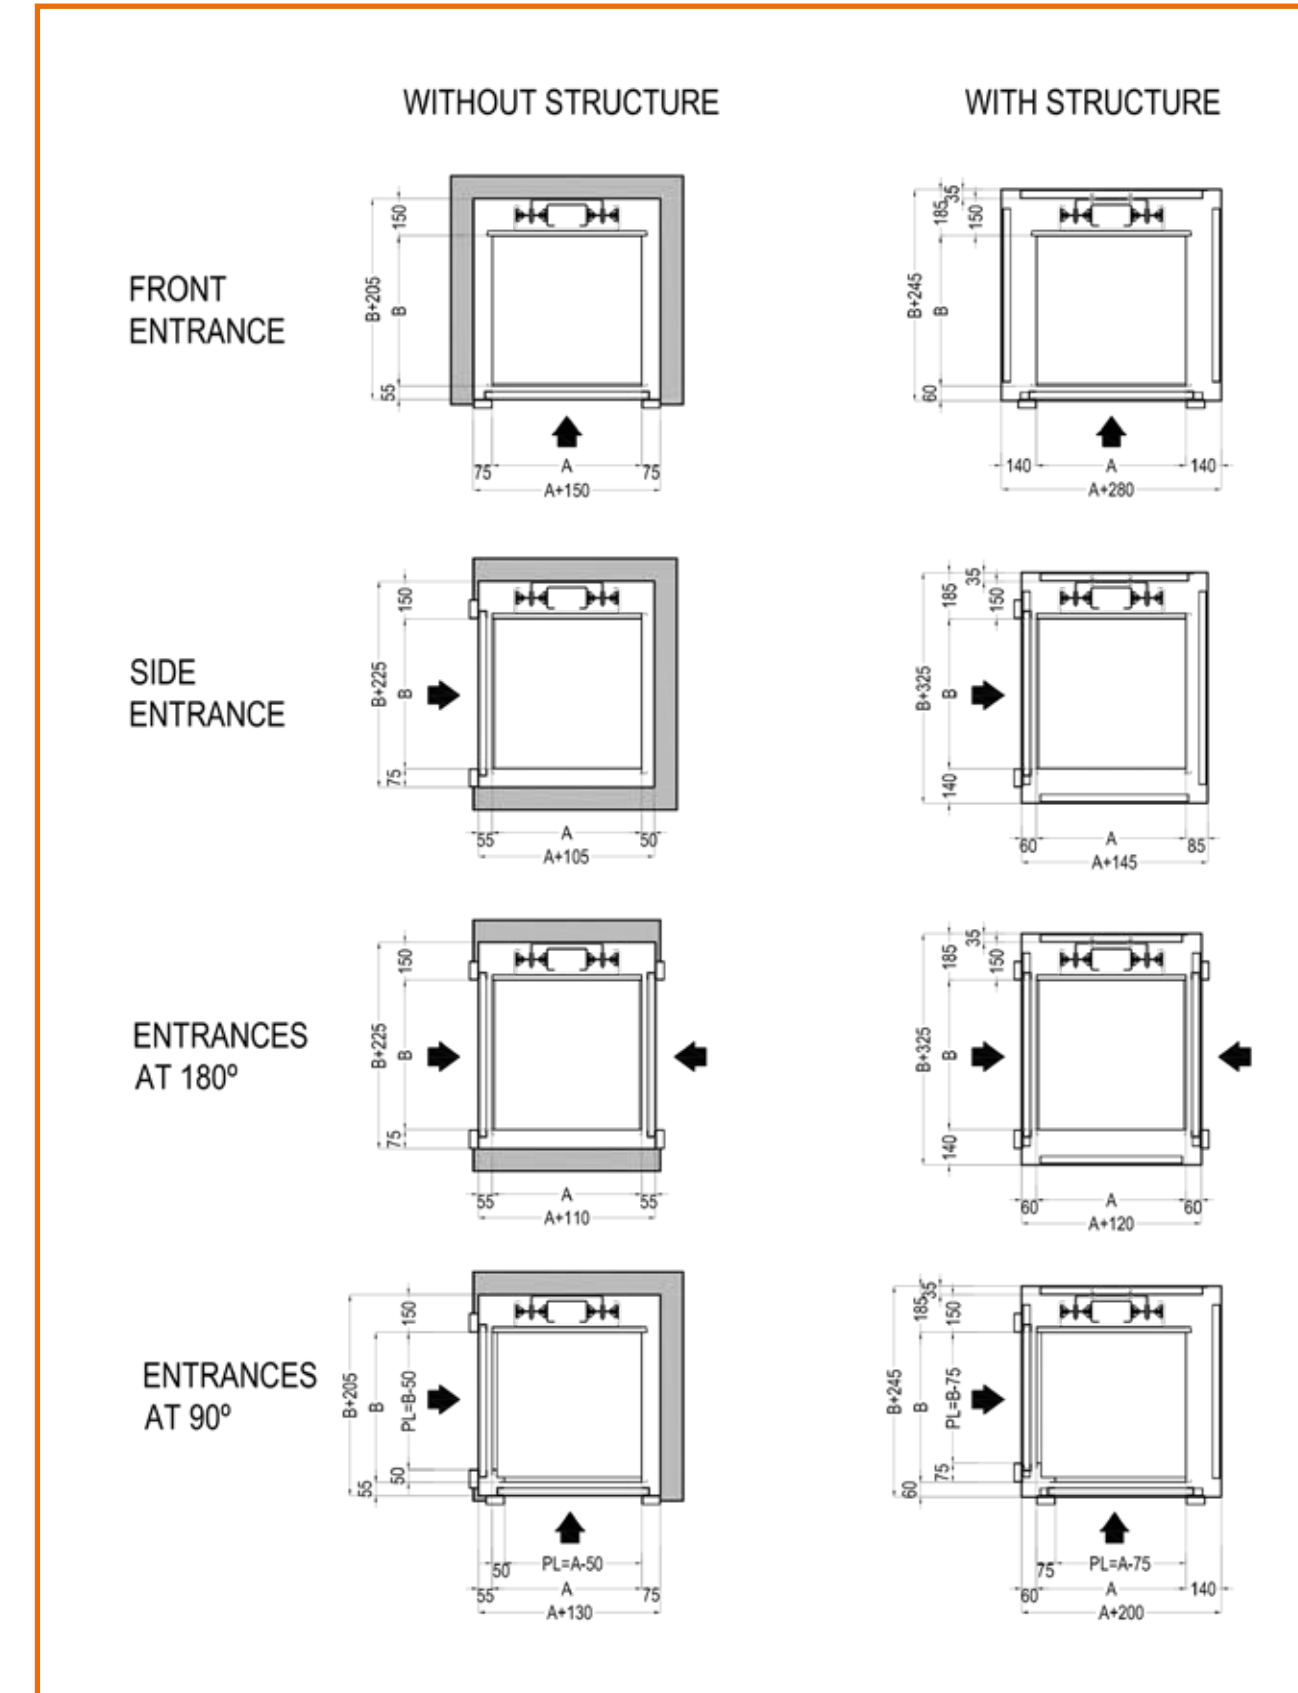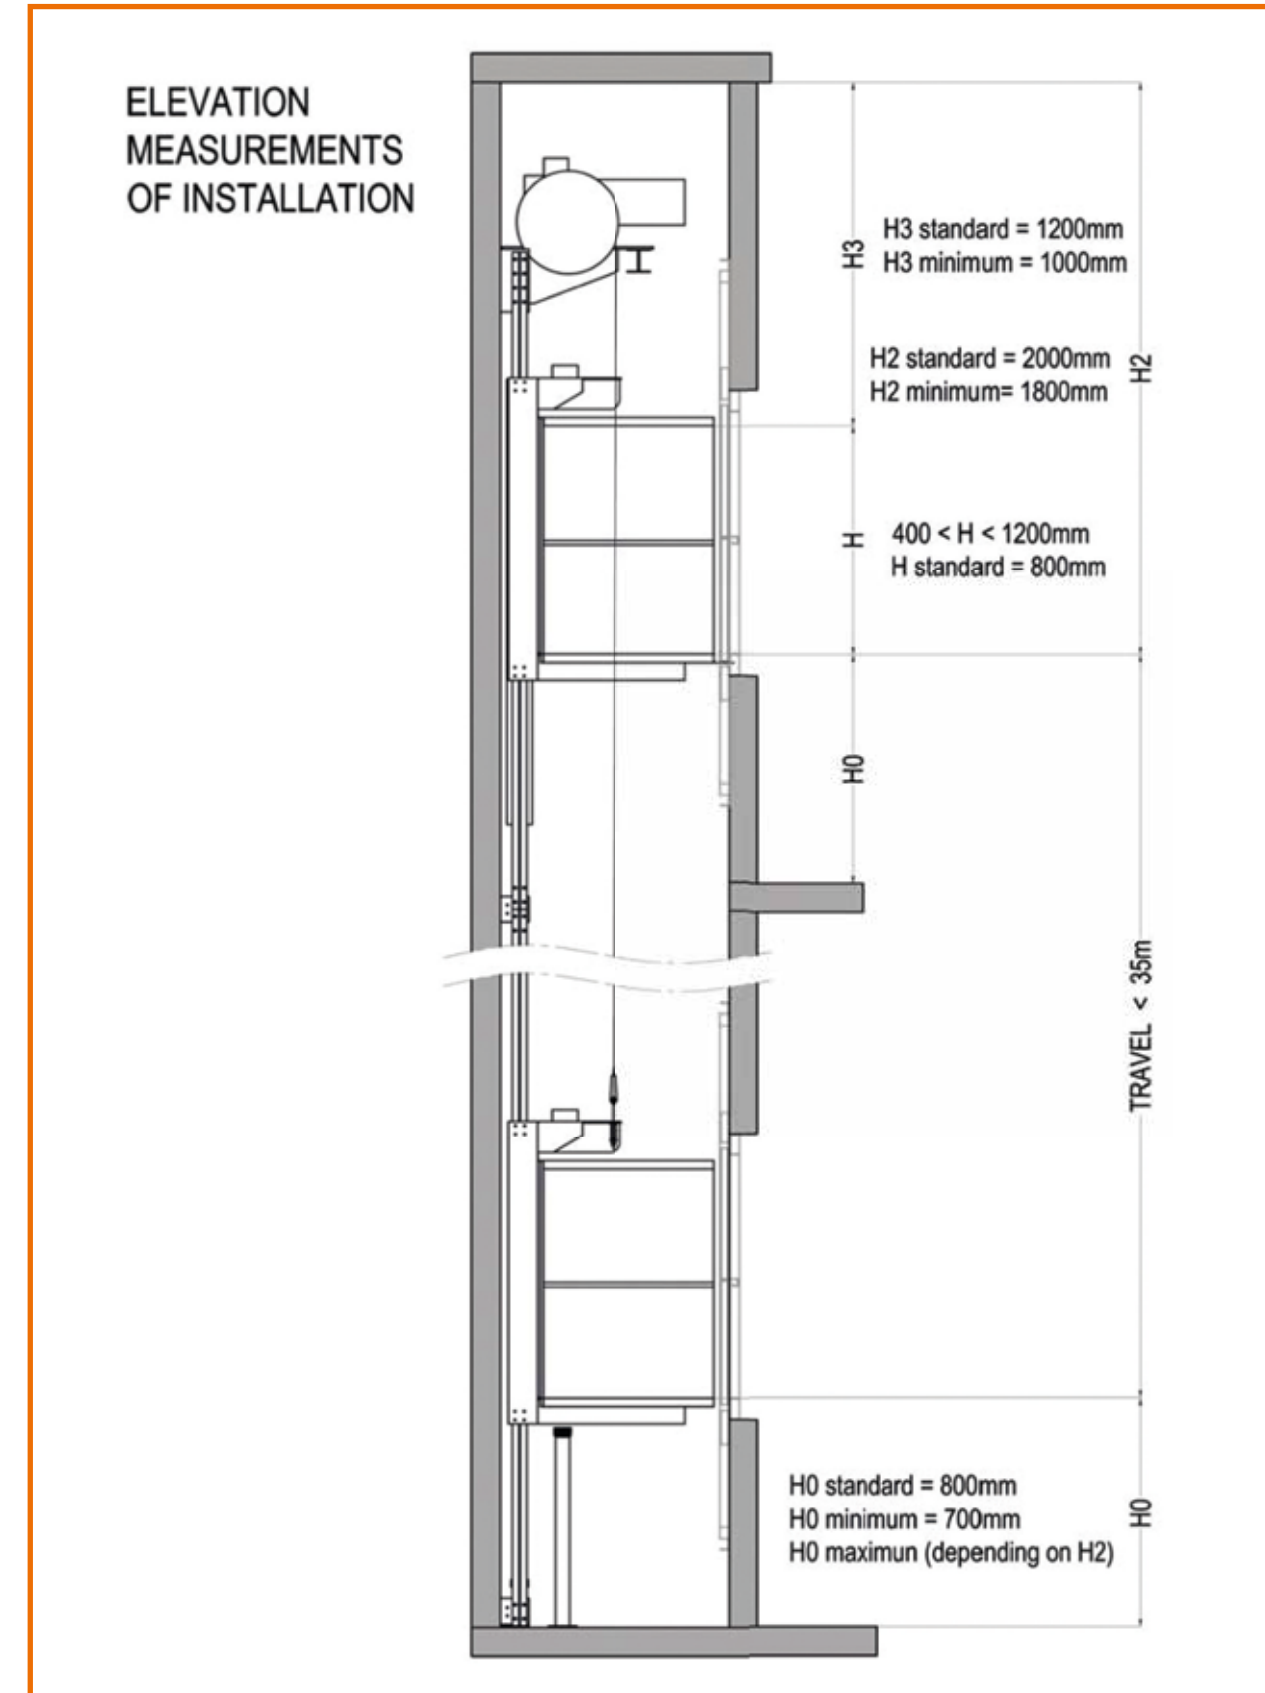

DETAILS:



DIRECTIVE & STANDARDS:

This product has been manufactured according to Machinery Directive 2006/42/EC.

The following Standards & Rules have been considered for its design and manufacture:

- UNE-EN ISO 12100:2012
- UNE-EN 81-31:2011